


# Profile Data Rod Seal RS35



## Function

Rod seals are designed to seal the pressurized hydraulic fluid against the atmosphere or between two pressurized spaces.

## Features

- ⇒ Asymmetrical, double acting compact rod seal, designed with interference on the OD which provides a good static fit in the groove.
- ⇒ Excellent static and dynamic sealing performance.
- ⇒ Excellent performance in low pressure conditions.
- ⇒ For rotary applications the interference on the OD has to be increased (better static fit to reduce the danger of the seal rotating in the housing), the preload has to be reduced (lower friction).

## Application


Reciprocating rods in hydraulic cylinders, plungers.  
 Static and dynamic seals in hydraulic systems, replacement for O-Rings (no twisting or pumping), alternative design for composite rod seals (PTFE + O-Ring energizer).  
 Max. pressure 400 bar, max. speed 0.4 m/s.

## Installation

Snap-in installation.

## Seal housing recommendation

| Tolerances        | [mm]      |            |
|-------------------|-----------|------------|
| L < 10mm          | +/- 0.2   |            |
| L ≥ 10mm          | +/- 0.3   |            |
| ∅ NA              | H9        |            |
| ∅ NI              | h10       |            |
|                   |           |            |
| Surface roughness | Rtmax [μ] | Ra [μ]     |
| Bottom of groove  | ≤ 6.3     | ≤ 1.6      |
| Face of groove    | ≤ 15      | ≤ 3        |
|                   |           |            |
| Sliding surface   | Rtmax [μ] | Ra [μ]     |
| PU, elastomer     | ≤ 2.5     | ≤ 0.1-0.5  |
| PTFE              | ≤ 2       | ≤ 0.05-0.3 |

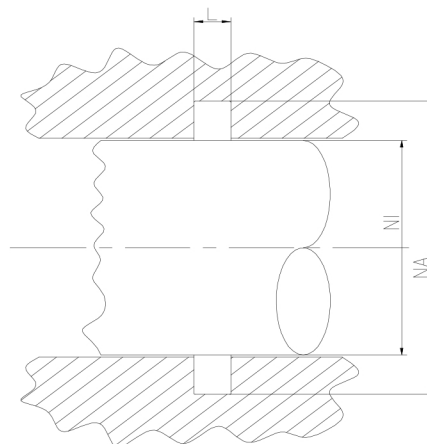

Sealco House, Maypole Fields Halesowen, West Midlands, UK, B63 2QB

T: (+44)1384 413058 E: sales@sealco.co.uk W: www.sealco.co.uk