




O.L. Seals A/S

## **Piston Seals**

Kefloy O-Cap<sup>®</sup> Type 2552-

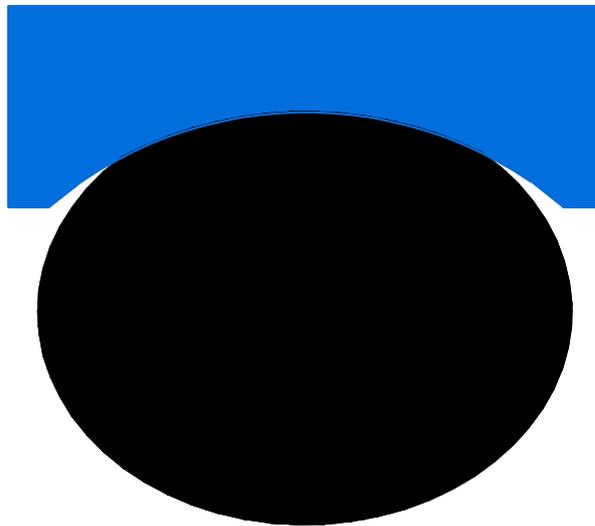

Double acting rod seal for reciprocating movements.

Consists of a thin ring of Kefloy energized by a rubber O-ring.

Eliminates frictional problems of O-rings.

Designed for Swedish Standard and Japanese Standard O-ring grooves.



### O-Cap® Type 2552-

O-Cap® type 2552- is a double acting piston seal. It uses the same groove dimensions as O-Rings according to Swedish and Japanese standard. It consists of a Kefloy® ring energized by a rubber O-Ring. The O-Cap® is designed to eliminate the frictional - and wear problems, which may occur with rubber O-Rings.

O-Cap® is pressure responsive.

O-Cap® can be used with a great variety of fluids. Kefloy® is compatible with virtually all fluids.

O-Cap® is designed to replace rubber O-Rings where they cause frictional - or wear problems.

O-Caps® should not be used for new designs.



### Working Range

#### Pressure

Up to 35 MPa. For pressures exceeding 35 MPa, please contact your O.L. Seals distributor.

#### Temperature

-50°C to + 200°C, though limited by O-ring. For temperatures exceeding this temperature range, please contact your O.L. Seals distributor.

#### Velocity

Reciprocating up to 15 m/sec. Frequency: Up to 5 HZ. Should not be used for rotating or oscillating applications.

#### Fluids

Kefloy® is compatible with virtually all fluids – liquids as well as gases. By selecting the right compound for the O-Ring energizer, it is possible to cover almost all fluids.

### Advantages

- Fits Swedish standard O-Ring grooves
- Small installation dimensions
- Good wear resistance
- Low friction

- No stick-slip
- Simple groove design
- Available for all diameters up to 2.500 mm
- Compatible with virtually all fluids

### Material Selection Guide

Fluid	Mating surface	O-Cap® compound
Hydraulic oil Motor oil Grease Other mineral oils	Steel Chrome plated steel Cast iron	Kefloy® 32
Water Water hydraulic Steam Non lubricating fluids Air, dry or lubricated	Aluminium Stainless steel Bronze Soft metals Steel Chrome plated steel Cast iron Aluminium Stainless steel Bronze Soft metals	Kefloy® 25 Kefloy® 90 Kefloy® 25 Kefloy® 28 Kefloy® 90

Fluid	O-Ring compound
Hydraulic oil Motor oil Grease Other mineral oils Water, cold Water hydraulic Air, dry or lubricated	NBR (Buna N) At temperatures above 120°C use Viton O-Rings
Water, hot Steam	EPDM
Synthetic hydraulic fluids	Special compounds

*O-Ring manufacturer's recommendation for the actual fluid should always be followed.*

*For other fluids or sealing surfaces, please consult your O.L. Seals distributor.*



### Seal Selection Guide

#### Standard Series

For most double acting applications the Standard Series is the best choice.  
Can be used for single acting applications where the fluid is a gas.

#### Light Duty Series

Where very low friction is required, the Light Duty

Series is recommended.

Where space limitations make it necessary the Light Duty Series should be chosen.

#### Heavy Duty Series


Where a very long service life is required the Heavy Duty Series should be chosen.

#### Ordering Example

O-Cap® for Swedish standard O-Ring groove for O-Ring with no back-up ring

Piston diameter: 155.5 mm

Part no	25523-1555-32
O-Cap® Type	_____
Series	_____
Rod dia. x 10	_____
Compound no	_____
O-Ring size 144.3 x 5.7	
O-Ring to be ordered separately	

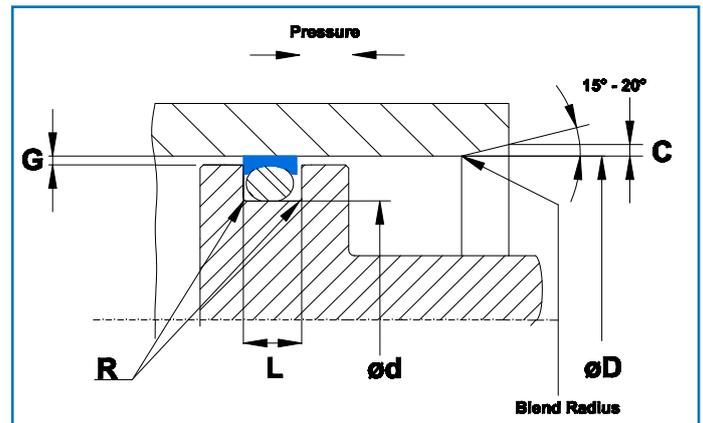

### Installation Dimensions

#### Notches

In systems with rapid pressure changes, e.g. power steering systems, it is necessary to furnish the O-Cap® with sidewall notches. The notches ensure a quick seal response to pressure changes.

To order O-Cap® with notches – add suffix “N” behind the compound code.  
Example: 25523-1555-32N.

Type No.	Standard Series Bore diam	d Groove diam.	L Groove width	R Radius	G Radial gap				C Chamfer	B O-ring ID	O-ring Cross section
					2MPa (20 bar)	10MPa (100 bar)	20MPa (200 bar)	35MPa (350 bar)			
	H9	h 9	+0.2 -0	Max.					Min.		
25520	8-24.9	D - 4.0	3.20	0.4	0.10	0.10	0.08	0.05	0.70	ød	2.40
25521	25-54.9	D - 5.0	4.00	0.4	0.15	0.15	0.10	0.07	1.00	ød	3.00
25522	55-159.9	D -10.0	7.50	0.6	0.25	0.20	0.15	0.08	1.30	ød	5.70
25523	160-265.9	D-15.0	11.00	0.8	0.35	0.25	0.20	0.10	2.00	ød	8.40

#### O-Ring Size

O-Ring cross section according to installation dimensions.  
O-Ring I.D. as close to dia. d as possible.  
O-Ring I.D. not bigger than d+3%  
O-Ring I.D. not smaller than d-5%

#### Important Note

The limits of pressure, temperature and velocity are individual maximum values. Heat generated by the friction may cause local increase of temperature. The cooling possibilities for the system determines the combinations of maximum values.